

ABSTRACT	
Schedule -1 (Extension of HT link line)	
Schedule -2 (Providing 1X25 KVA DTC structure)	8642
Schedule -3 (Providing 1X25 KVA DTC)	102554
Schedule -4 (Extension of LT line)	93357
GRAND TOTAL	17004
	221557

Report: This Estimate amounting to Rs: 221557 is prepared For 10 HP, GIP Lt4(c) 02 Nos of 1) Sri Halashetty s/o Rangashetty & 2) Sri Darmashetty s/o Halashetty, for 1X25 KVA DTC at Savasihalli Village Limits in Hagare Section, Belur Sub Division. (Under sheegra samparka Scheme)

This work involves the following

- 1) In this estimate proposed 11 KV line run over a distance of 0.020 Kmtrs as shown in sketch.
- 2) In this estimate praposed 1 X 25 KVA Proposed transformer center is as shown in sketch.
- 3) In this estimate proposed LT line run over a distance of 0.020 Kmtrs as shown in sketch.


In this estimate providing 1X25 KVA DTC for Proposed 02 Nos IP set's as per request of Sri 1) Sri Halashetty s/o Rangashetty & 2) Sri Darmashetty s/o Halashetty, for 1X25 KVA DTC at Savasihalli Village Limits, for this new Proposed transformer is proposed due to the existing transformer overloaded not with stand new load therfore they comes to make seperate DTC. Earlier these consumers supply feeding from the existing 25 KVA Savasihalli IP DTC having connected IP load of 20 HP IP load. therfore new consumers comes to make seperate 1 X 25 KVA DTC. this new 1 X 25 KVA DTC will tapping from 11 kv branch line of Mallapura Feeder feeding from Hagare 66/11kv Muss.

In this estimate the 11 kv line and tranformer center work's are carried by the consumers, and the 1 X 25 KVA distribution transformers are given by department side.

The line diagram, feder sketch, Station feasibility report, HTVR charts` are enclosed with this estimate and all necessary provisionals are made in this estimate, so kindly sanction this estimate as early as possible.


All necessary provisions are made in this estimate kindly sanction as early as possible.

Certificate :- Certified that I have personally visited the spot & prepared this estimate by using current New SR in most Economical and safe way of executing the work.



DTC near Savasahalli village limits in Hagare section Belur sub division. (Under sheegra samparka scheme)

SKETCH:-

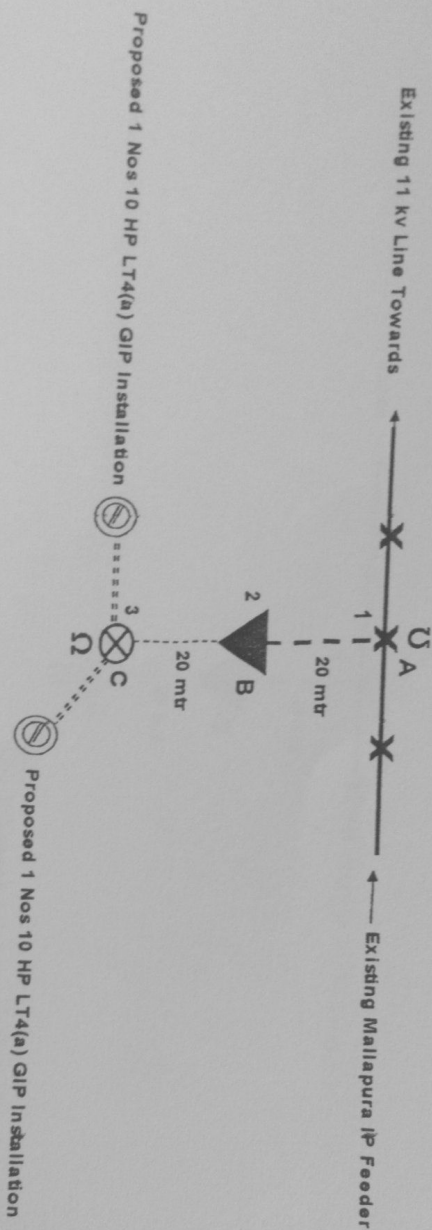

Index

Existing 9 mtr RCC/PSC Poles
Proposed 8 mtr RCC Pole for LT
Proposed 2 Nos 10 HP LT(4) GIP Installation
Proposed Guy set
Proposed 1X25 KVA DTC
Proposed LT Lines
Proposed 11 kv line

John